

MAXIMILL 3000 is made from stainless steel. Firstly, the operator of machine pours fruits and vegetables into the washing tub with clean water. Conveyor lifts the products up to the mill. During the lifting process, water nozzles spray the fruits and vegetables with clean water. The mill crushes the products after they reach the top of the conveyor. Finally, the fruit and vegetable mash come out of mill.







• The crushing head of the machine is round. All the crushed mash goes directly out for further processing. This feature significantly helps when washing the head, as there are no corners.

Usually a lot of fruit mash gets stuck in the corners of squareshaped heads for hours and can cause juice fermentation. For that reason, our round shape technology is superior to other producers'.

- The machine has an additional table in front of the basin for putting fruits or boxes on it. It facilitates the process of pouring the products into the basin.
- V form washing basin helps fruits and vegetables move directly to the conveyor, therefore less fruit stay in the basin.
- Integrated water-spraying system provides additional washing when lifting the fruits up the conveyor.
- Belt conveyor has a water drainage and speed regulation system.

• The speed of the belt conveyor is adjustable in the control panel.


JSC/UAB PROFRUIT MACHINERY www.pro-fruit.com info@pro-fruit.com Ph. Nr. +370 633 64143







• Optional replaceable cutting graters/sieves are available for different fruits and berries.

- The mill does not damage the fruit seed.
- The machine is easy to clean after using.
- Powerful 4 kW crushing engine can crush various fruits, berries and vegetables from soft raspberries to hard apples, beets, etc.
- The machine is entirely made of stainless steel.
- Same smaller efficiency machine MAXIMILL 1000

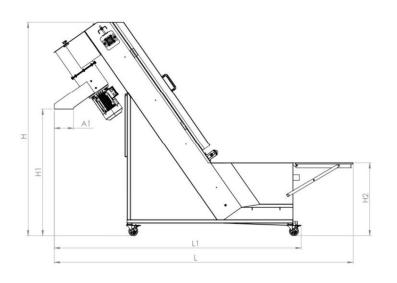





V	Machine	Fruit and vegetable washer-elevator-grinder	
PROFRUIT	Туре	Maximill 3000	

Output	kg/h	3000
L	mm	3250
L1	mm	2740
W	mm	735
W1	mm	300
н	mm	2322
H1	mm	1376
H2	mm	800
AxB	mm	860x700
A1xB1	mm	210x258
Dry weight	kg	225
Supply source	kW	4.8
Supply voltage	V	3/N/PE ~ 400 V 50Hz

JSC/UAB PROFRUIT MACHINERY www.pro-fruit.com info@pro-fruit.com Ph. Nr. +370 633 64143